


10km optical module sensitivity

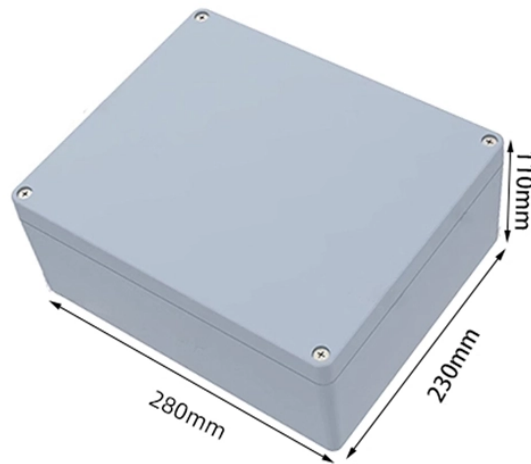


Overview

Supporting 10km reception over single-mode fiber with 4 LAN WDM wavelengths, this module provides -10.6 dBm average receiver sensitivity at rates up to 112.5 Gbps. It is typically implemented using SFP+ transceivers and defined under IEEE 802.3. This product is a transceiver module designed for 10km optical communication applications. The transmitter path incorporates an EML Driver and a cooled EML together. On the receiver, it features a cooled EML. Please help check if there is any official documentation introducing 10G 10km and 40G 10km optical modules regarding optical attenuation values, link loss, transmit optical power (Tx Power), receive sensitivity (Rx Sensitivity), receive overload point (Rx Overload), and other. Modulatek newly launched model SFP-10G-LR-10KM-C-H15 optical module products, can support 10G Ethernet transmission 10km in single-mode fiber, Modulatek Labs on the product samples for testing, to facilitate a further understanding of the product's performance indicators and the effect of the TFAULT is an open collector/drain output, which should be pulled up with a 4. Pull up voltage should be between

2. This optical module has a 1310nm DFB transmitter and a PIN receiver, which ensure the reliable transmission of data in both commercial (0 to 70°C) and industrial (-40 to 85°C) temperature ranges. Low power consumption and.

10km optical module sensitivity



This SFP module is based on the 10G Ethernet IEEE 802.3ae standard and is designed to be compliant with the SFF-8431 SFP Multi-source Agreement (MSA). This module is designed for single mode ...



Asterfusion compatible 10GBASE-LR SFP+ Transceiver Module, up to 10km over SMF, applied for 10 Gigabit Ethernet, larger campus networks, enterprise ...



These values represent the damage threshold of the module. Stress in excess of any of the individual Absolute Maximum Ratings can cause immediate catastrophic damage to the module even if all ...



This product is a transceiver module designed for 10km optical communication applications. The module incorporates one channel optical signal, on 1310nm center wavelength, operating at 50Gbaud data rate.



Our 100GBASE-LR4 RX-Only QSFP28 module enables specialized receive-path applications for network monitoring and test equipment. Supporting 10km reception over single-mode fiber with 4 ...



Please help check if there is any official documentation introducing 10G 10km and 40G 10km optical modules regarding optical attenuation values, link loss, transmit optical power (Tx ...



10GBASE-LR is a 10-gigabit Ethernet optical standard that operates at 1310 nm over single-mode fiber (SMF), supporting link distances of up to 10 km.



Asterfusion compatible 10GBASE-LR SFP+ Transceiver Module, up to 10km over SMF, applied for 10 Gigabit Ethernet, larger campus networks, enterprise backbones, and data centers.



From the actual test situation, the module's key parameters and indexes are in line with the definition of Moduletek's datasheet, and are comparable with the performance of similar modules ...



This product is a transceiver module designed for 10km optical communication applications. The module incorporates one channel optical signal, on 1310nm center wavelength, operating at 50Gbaud data rate.



Test Assured Program FS truly understands the value of compatibility and interoperability to each optics. Every module FS provides must run through programming and an extensive series of ...

Contact Us

For more information, pricing, or custom energy solutions, please contact us:

Website: <https://gdroofing.co.za>

Email: sales@gdroofing.co.za

Phone: +27 72 418 9365

Address: 22 Electron Avenue, Isando, Johannesburg, 1600, South Africa

This document is for informational purposes only. Specifications subject to change without notice.

