


## Distance of cable tray markings

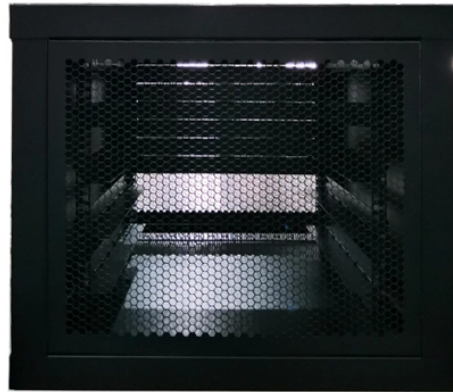

### Overview

When cable trays contain conductors rated over 600 volts they are required to be marked “DANGER — HIGH VOLTAGE — KEEP AWAY” at no further than 10-foot intervals. What has changed is the way those labels are required to look in order to adequately warn of the. Understanding cable tray spacing is key to meeting safety regulations and maintaining system performance. The spacing between trays, whether horizontal or vertical, depends on various factors like cable type, environment, and tray material. Proper installation can significantly reduce the minimum bend radius for cables as they exit the bottom of the cable tray. GDR is a headquartered manufacturer with over 130 years of supplying solutions for the electrical and data markets.

## Distance of cable tray markings



When fitting cable trays and their accessories, the products are cut on site to create changes of direction, adjust sections, etc. Damage can also occur during handling; as a result, both the ...



Discover the essential cable tray spacing requirements for safe and efficient installation. Learn key standards, horizontal and vertical spacing, and more.



The Cable Tray Institute is making available the current edition of this practical guide for the proper installation of aluminum or steel cable tray systems. These guidelines will be useful to engineers, ...



Explore the essential cable tray support spacing requirements for safe and efficient installations. Learn NEC guidelines for perforated, ladder, and wire mesh trays.



Commonly called the Load Class, this defines the load-carrying capability of the tray for a specific support span distance. The design and cost of the cable tray is greatly affected by this designation.



DISTANCE SHALL 3 FEET. 4 INCHES. FOR SEISMIC SUPPORTS. PLANS. DETAILS. SEE Zt3-000.



Cable tray length is selected based on the load to be supported, the distance between the supports (also referred to as the span), and handling and installation constraints.



Some of these criteria include the required load that the cable tray must support, the distance between the cable tray supports, and ease of handling and installation.



Cable trays containing conductors rated over 600 volts shall have a permanent, legible warning notice carrying the wording "DANGER — HIGH VOLTAGE — KEEP AWAY" placed in a readily visible ...



Cable trays less than 730 12 ft in length should be supported in a minimum of one location; and trays over 12 ft in length should be 731 supported at a minimum of two locations.

## Contact Us

For more information, pricing, or custom energy solutions, please contact us:

Website: <https://gdroofing.co.za>

Email: [sales@gdroofing.co.za](mailto:sales@gdroofing.co.za)

Phone: +27 72 418 9365

Address: 22 Electron Avenue, Isando, Johannesburg, 1600, South Africa

This document is for informational purposes only. Specifications subject to change without notice.

